Analog Door Entry Phones

BRAVE







Presentation

Alphatech expands its range of analog door entry phones by BRAVE door phone line. The BRAVE door entry phones range is available in versions:

- 1 or 2 pushbuttons
- · with or without integrated analog colour camera
- Comfort or Low cost model
- Vandal-proof housing with 1 button and camera

Features

- Hands free communication powered by telephone line only
- Tone (DTMF) and Pulse dial
- 2 numbers with max 24digits saveable under each button (including *,#,Flash and Pause)
- DAY/NIGHT switching automatically from time ¹ or by code from phone
- 2 independent contacts (relays) ^{/1}
- 8 different switching modes for each relay
- Switching by one or two pulses (sliding gate) when electrical lock is used
- Electronical volume settings without neccessity open the unit
- Adjustable acoustical signalization
- /1 version Comfort only

- Integrated color analog camera /c
- Automatical lighting for camera by infra LED ^{/c}
- Possibility of permanent feeding by external power supply 12V /1 /c
- Integrated unit heating
- Grounding output for better protection against static electricity
- PC programming by USB cable /* or remotely by DTMF (phone). PC programm BraveSet is compatible with all Windows releases.

/c - version with camera only

/* - option



TECHNICAL DATA

GENERAL

- Operating position :

> Temperature : -20 to + 50°C > Humidity : 10% / 80% at 30°C

- Dimensions: 185 mm x 99 mm x 40 mm

- Weight: 350g

- Basic function powered from telephone line

- Power supply 12-24V DC, 10-15V AC

- Power compsumption: max 250mA

- Protection rating: IP44

Telephone line

- Impedance: 220R+820R//115nF (600ohm)

- Voltage of line: 20V-60V - Current of line: 20mA-60mA - Dial: tone (DTMF) / pulse

Other


- Max. voltage or relay: 48V - Max. current of relay: 1,5A

- Camera output: PAL $1V_{pp}$ at 75ohms - Board heating: 1,5W with temp. regulation



Surface cover:



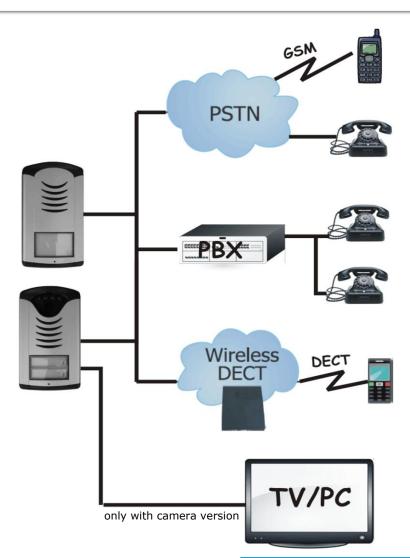

Ditributor: