


ReMic B

Durable ReMic for mounting outside the lift car

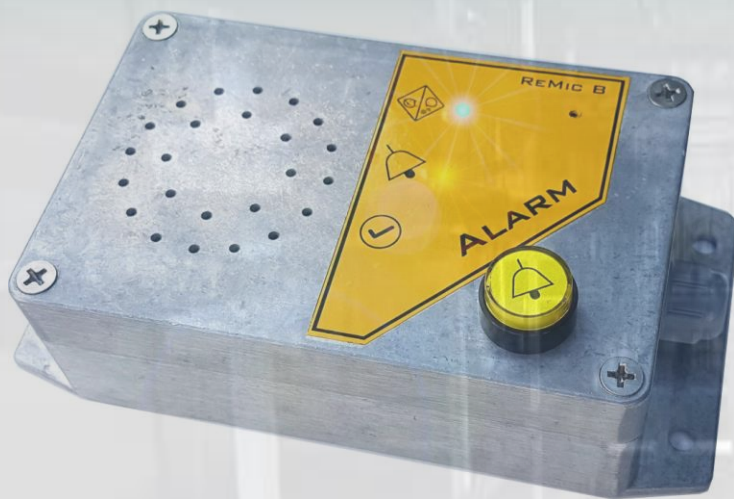


- ✦ For combination with ReMicLR in the lift car
- ✦ For GSM Lift Watch Voice
- ✦ Built-in activation button
- ✦ Operation and status indication according to EN 81-28
- ✦ Terminal board for external pushbutton
- ✦ Input for activation by voltage

Aluminium, 125 x 80 x 40 mm

4 holes of 5.5 mm diameter for mounting

6.5 mm gland

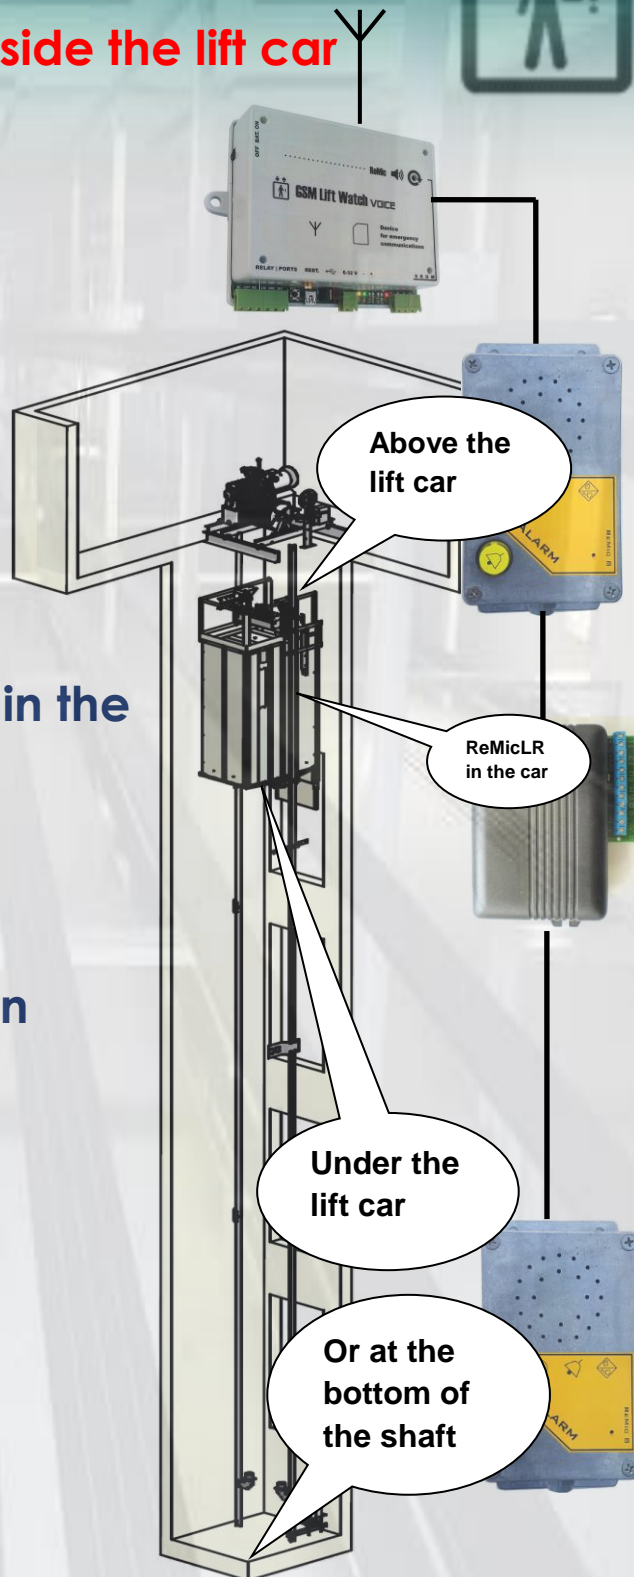

ALPHATECH
Tech

Emergency communicators for each lift

ALPHATECH TECHNOLOGIES s.r.o., Jeremenkova 88, Praha 4, CZ, www.alphatechtechnologies.cz